



## INTERNAL STRAP SYSTEM

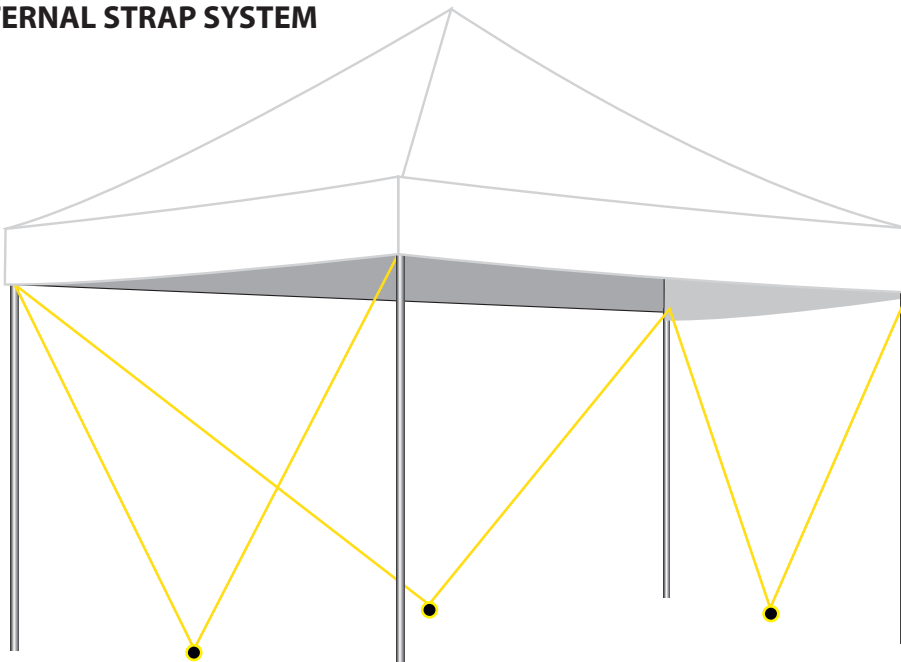

If there is no room for the straps to be used as below, or in the event that trip hazards are an issue, use this scheme for securely stapping down your pop up.

Use double pegs in centre between the legs in windy conditions. The walls fit outside the guying straps. Make sure the walls are also securely pegged.

## NORMAL STRAP SYSTEM

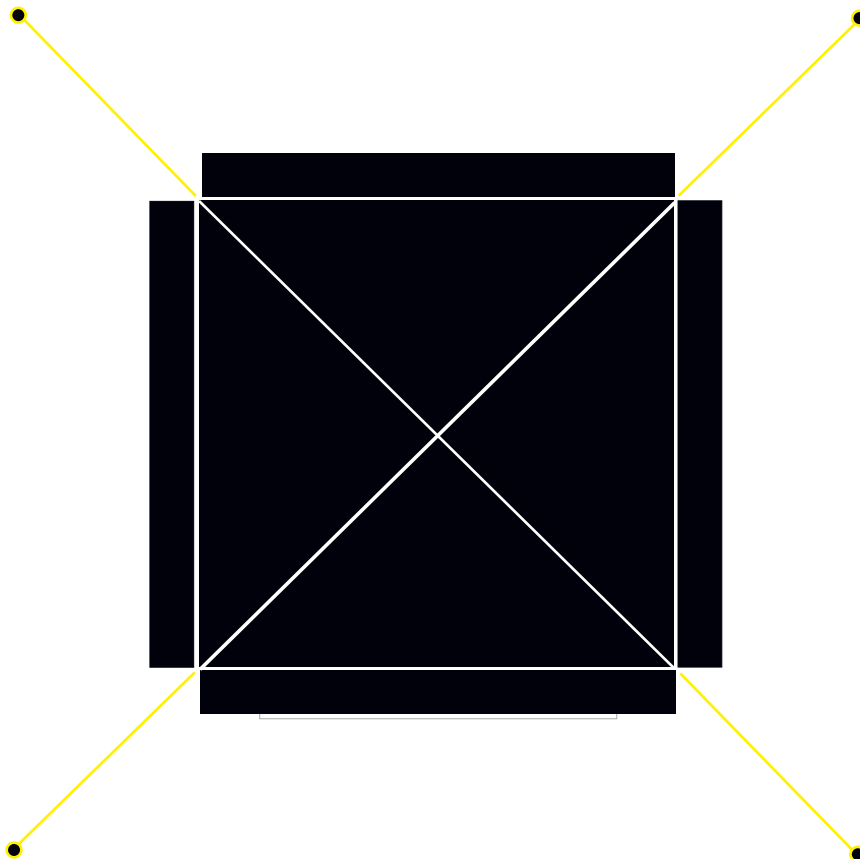

Hammer in guying pegs 1 metre from leg, at a 45° angle to the sides of the tent.

Make sure the "rusty" peg is hammered flush with the ground in windy conditions.

In windy conditons put upwind pegs in before you erect the tent.

Attach the straps to the scissor frames close to the leg sliders. It is best to have the short straps at the top and the long straps at the bottom.

Make sure that wall and foot pegs are used in windy conditions. Check regularly to see that pegs are not pulling out of the ground, especially if the ground is soft