


PROFESSIONAL MARQUEE RANGE - DIMENSIONS & MATERIAL SPECIFICATIONS

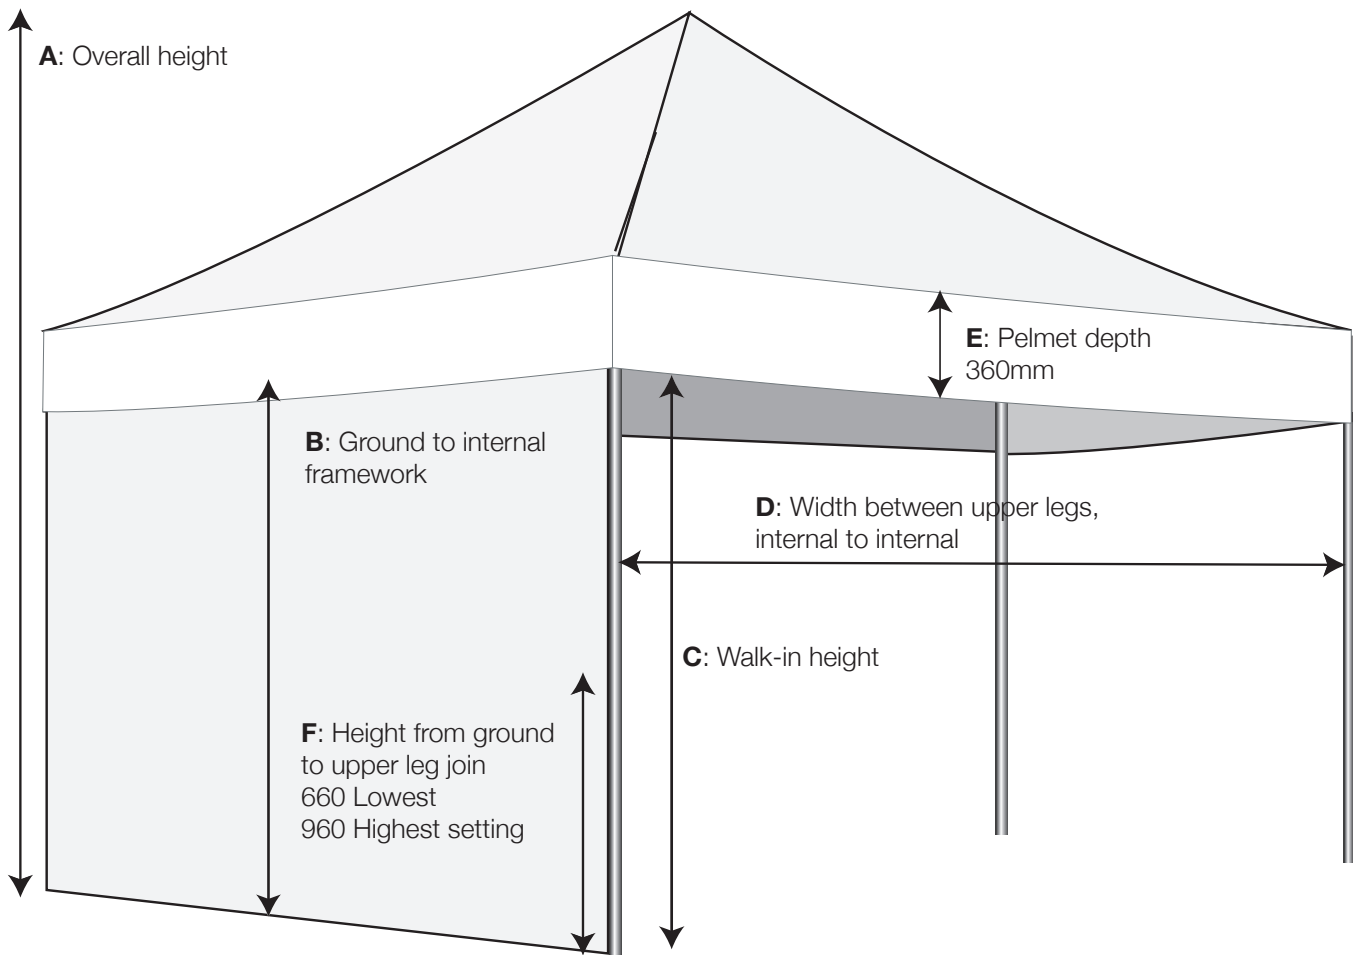

DIMENSIONS

Tent Size	Frame weight kgs	Overall Height A (m)	Ground to internal framework B (m)	Walk-in Height C (m)	Distance between Upper legs, internal at front of tent D (m)	Pelmet Depth E (m)	Packed Size F (m)	Typical Boxed Weight * kgs
2x2m	25	2.9-3.2	2.215	2.14	1.91	0.36	1.64x0.3x0.3	
2.5x2.5m	28	2.9-3.3	2.215	2.14	2.416	0.36	1.64x0.4x0.4	
3x2m	29	2.9-3.2	2.215	2.14	2.91	0.36	1.64x0.4x0.3	
4x2m	35	2.9-3.2	2.215	2.14	1.91	0.36	1.64x0.5x0.3	
3x3m	32	3.3-3.6	2.215	2.14	2.91	0.36	1.64x0.4x0.4	39
4.5x3m	45	3.3-3.6	2.215	2.14	4.41	0.36	1.64x0.5x0.4	
6x3m	57	3.3-3.6	2.215	2.14	2.91	0.36	1.64x0.6x0.4	
6x6m	110	3.7-4	2.215	2.14	2.91	0.36	1.64x0.6x0.6	120
4x4m	42	3.4-3.7	2.215	2.14	3.91	0.36	1.64x0.5x0.5	
								* depends on specification & extras

MATERIAL SPECIFICATIONS

Upper leg: 42x42x2mm, aluminium

Lower leg: 35x35x2mm, aluminium

Scissor frame: 40x20x2mm, aluminium

King post: upper 42x42x2mm, aluminium tensioned by a spring, lower 35x35x2mm aluminium

All brackets: welded steel

All tubes: aluminium 6063, matt silver anodised

All bolts: male/female die-cast aluminium with plastic saddle washers

Leg bungs: profiled rubber - re-cyclable

Canopy: 500D polyester or 450gsm PVC

Walls: 500D polyester or 450gsm PVC

Fire retardant to: BS7837 (Certificates available if required)